




## High Capacity

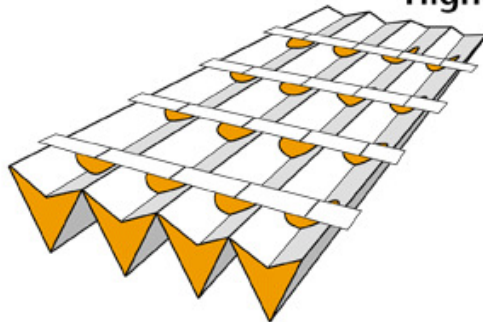

Increased Holding Capacity up to 5 times higher than other filter than any other filter types on the market thanks to added strips created new paint deposit areas.

**Holding capacity up to 28 kg/m<sup>2</sup> \*\***

**Filtration efficiency up to 98,3% \*\***



### Optimized using conditions :

Recommended air velocity: 0.25 - 1 M/S

Pressure drop at:	0.25 M/S	➤	8 Pa
	0.5 M/S	➤	20 Pa
	0.75 M/S	➤	30 Pa
	1 M/S	➤	40 Pa

Maximum recommended pressure drop: 128 Pa - possible up to 256 Pa

HEIGHT - AREA		75cm - 8 m <sup>2</sup>	90cm - 8 m <sup>2</sup>	100cm - 8 m <sup>2</sup>
BROWN		AF731	AF931	AF131
WHITE		AF733	AF933	AF133
FLAME RETARDANT		AF732	AF932	AF132
Number of filters per pallet		60	60	60

\*\*depending on paint used