



High Efficiency

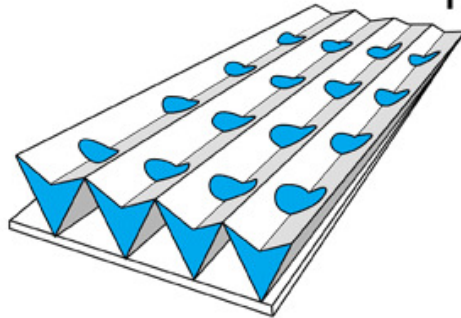

Increased High filtration Efficiency, close to 100% thanks to an added final polyester layer, keeping the loading capacity of the STandard filter.

**Holding Capacity up to 20 kg/m<sup>2</sup> \*\***

**Filtration efficiency up to 99.2% \*\***





**Optimized using conditions :**

Recommended air velocity : 0.25 - 1 M/S

Pressure drop at:

0.25 M/S	➤	8 Pa
0.5 M/S	➤	21 Pa
0.75 M/S	➤	32 Pa
1 M/S	➤	42 Pa

Maximum recommended pressure drop : 128 Pa - possible up to 256 Pa

HEIGHT - AREA		75cm - 8m <sup>2</sup>	90cm - 8m <sup>2</sup>	100cm - 8m <sup>2</sup>
BROWN		AF721	AF921	AF121
WHITE		AF723	AF923	AF123
FLAME RETARDANT		AF722	AF922	AF22
Number of filters per pallet		60	60	60

\*\*depending on paint used