



High Holding

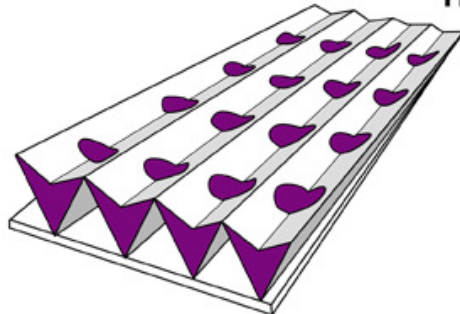

For a filtration efficiency and a holding capacity higher than the STD : reduced costs of the spray booth maintenance.

**Holding capacity up to 22 kg/m<sup>2</sup> \*\***

**Filtration efficiency up to 99%\*\***





**Optimized using conditions :**

**Recommended air velocity : 0.25 - 1 M/S**

**Pressure drop at:**

0.25 M/S	➤	8 Pa
0.5 M/S	➤	20 Pa
0.75 M/S	➤	30 Pa
1 M/S	➤	40 Pa

**Maximum recommended pressure drop : 128 Pa -possible up to 256 Pa**

HEIGHT - AREA	75cm - 8m <sup>2</sup>	90cm - 10m <sup>2</sup>	100cm - 10m <sup>2</sup>
BROWN 	AF751	AF951	AF151
WHITE 	AF753	AF953	AF153
Number of filters par pallet	52	52	52

**\*\*depending on paint used**