




The Original

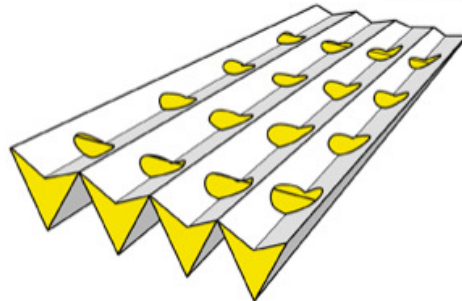

The original STandaRD world wide known as the most "easy to use and long lasting filter" on the market

Holding capacity up to 18 kg/m² **

Filtration efficiency up to 98.1% **

Flame retardant filter certified to the norm DIN53438 F1/K1






Optimized using conditions :

Recommended air velocity : 0.25 - 1 M/S

Pressure drop at:	0.25 M/S	➤	8 Pa
	0.5 M/S	➤	20 Pa
	0.75 M/S	➤	30 Pa
	1 M/S	➤	40 Pa

Maximum recommended pressure drop : 128 Pa - possible up to 256 Pa

HEIGHT - AREA		75cm - 10m ²	90cm - 8,35m ² *	90cm - 10m ²	100cm - 10m ²
BROWN		AF711	AF811	AF911	AF111
WHITE		AF713	AF813	AF913	AF113
FLAME RETARDANT		AF712	AF812	AF912	AF112
Number of filters per pallet		60	60	60	60

* 8.35 m² = 10 sqyd

**depending on paint used