




VOKES AIR

Taking small steps together, always ahead, towards a better world



Hepatex PB

For the separation of fine suspended particles

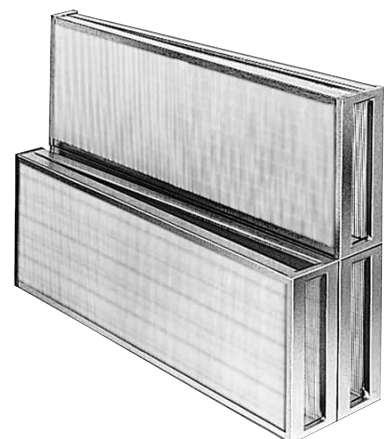



Hepatex PB

For the separation of fine suspended particles

APPLICATIONS



Clean Air



Power Generation



Clean Room



Industrial

KEY FACTS

- ▶ **Low pressure drop**
Reduced energy consumption and operating costs
- ▶ **Fully-utilised, large filter surface**
Extremely long service life
- ▶ **Optimised air flow**
For optimum performance and longer life
- ▶ **Paper filter medium**
No fibre loss
- ▶ **Inherently stable filter mat**
Eliminates dust penetration
- ▶ **Self-supporting, robust, cellular structure**
For rigidity, strength and high burst pressure

Hepatex PB filters are designed for the separation of fine suspended particles such as bacteria, viruses, soot, dust etc. They are used in supply and exhaust air systems, or in clean room installations in the nuclear, electronic, optical, medical or chemical industries.

Hepatex PB can be combined in a variety of units to suit most applications, particularly where the available space is limited.

Our filters offer long service life thanks to a manufacturing process that ensures high product quality.

The filter medium is tested for penetration, pressure drop, tensile strength, density, weight and water repellency. Each “glass” quality filter is submitted to the oil mist test and is guaranteed leak-free.

▼ Hepatex PB



Design, Materials


Hepatex PB are maintenance-free filter cell units, of size 86.5 x 202 x 600 mm, consisting of cell frame in galvanised or stainless steel, with cast-in, self-supporting mini-pleated filter media of cellulose, cellulose and glass, or glass fibres.

Installation

Whenever possible, Hepatex PB should be installed on the pressure side of the system, i.e. between the fan and the distribution duct work.


Sealing the filter cell

With Silicone or PU mastic or by special adhesive tape. One roll is sufficient for approx. 100 PB filters.

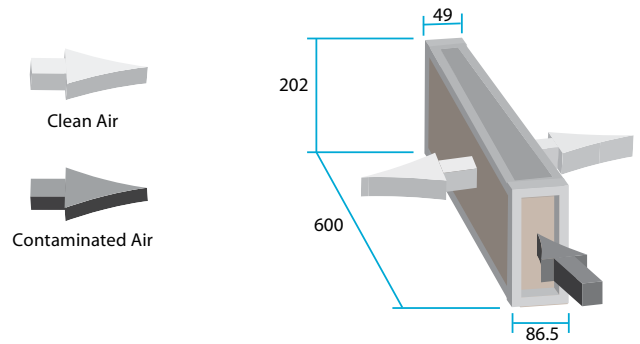

▲ Dimensions (mm)

Initial Pressure Drop

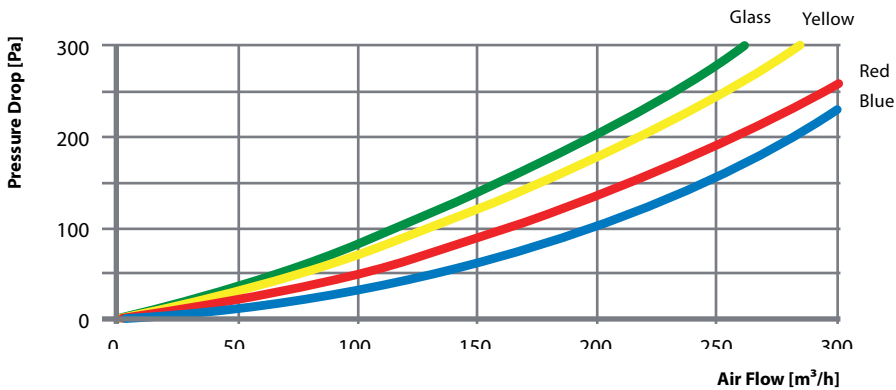

Technical Data		Blue	Red	Yellow	Glass
Filter media	–	Cellulose	Cellulose	Cellulose + Glass	Glassfibres
Active filter surface per cell	approx. m ²	2.8	3.4	3.4	2.8
Weight per filter cell	approx. kg	1.2	1.5	1.45	1.25
Rated air flow (V _{LN}) per filter cell	m ³ /h	200	200	200	200
Rated air flow per 610 x 610 mm module	m ³ /h	4250	4250	4250	4250
Initial pressure drop at V _{LN}	Pa	105	140	180	205
Nominal final pressure drop ¹⁾	Pa	600	600	600	800
Max. admissible relative humidity	%	85	85	85	100
Max. continuous temperature	°C	100	100	100	125/220
Filter Class to EN 779/EN 1822	–	F9	E10	E11	H13
Flammability classification to DIN 53438	–	K2/F2	K2/F2	K2/F2	K1/F1
Initial Separation Efficiency					
Sodium Flame test, EUROVENT 4/4 ²⁾	%	–	92.3	98.6	>99.995
MPPS-DEHS-Test to EN 1822	%	–	>85	>95	>99.97
Efficiency to EN 779 ³⁾	%	>95	–	–	–

1) Recommended final pressure drop approx. 2.5 times the initial pressure drop. | 2) GB: B.S. 3928 | 3) As well as ASHRAE 52.1

OUR LOCATIONS

ÖSTERREICH

Tel: +43 (0) 1 698 66 77 0

FRANCE

Tel: +33 (0) 1 64 07 61 25

ITALIA

Tel: +39 022 692 6321

SOUTH AFRICA

Tel: +27 (0) 114 250 470

SVERIGE

Tel: +46 (0) 325 661 600

UNITED KINGDOM

Tel: +44 (0) 1282 413 131

DANMARK

Tel: +45 364 966 00

SCHWEIZ

Tel: +41 (0) 433 992 700

NEDERLAND

Tel: +31 888 653 724

DEUTSCHLAND

Tel: +49 (0) 2339 128 00
oder +49 (0) 6181 9082 01

ESPAÑA

Tel: +34 937 522 718

In view of continuous research and development we reserve the right to modify specifications and dimensions without prior notice. For quoted standards, the issue valid at the print date of this leaflet is relevant.
© Vokes Air • 02/2011 • EN • 0126

www.vokesair.com



Taking small steps together, always ahead, towards a better world