




VOKES AIR

Taking small steps together, always ahead, towards a better world



Hepatex PL

The compact solution for highly pure air

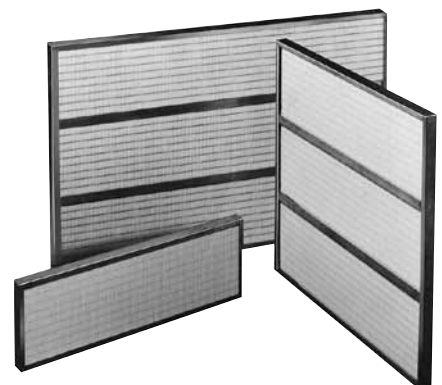



Hepatex PL

The compact solution for highly pure air

APPLICATIONS



Clean Air



Power Generation



Clean Room



Industrial

KEY FACTS

- ▶ **Available in efficiencies of 95% and 99.98% according to EN 1822**
To suit a variety of applications
- ▶ **Large filter area**
For a long service life
- ▶ **Anodised aluminium frame**
For rigidity, strength and low weight
- ▶ **100% leak-tested**
Guaranteed leak-free for assured performance
- ▶ **Low frame height – only 30 mm**
For space-saving installation
- ▶ **Fits securely into Filtrasept units**
For use directly at air outlet

Hepatex PL filters are high-efficiency submicron particulate air filters designed to protect people, equipment and processes from airborne particulate contamination.

Application

Hepatex PL filters are used in situations requiring high or very high levels of air purity. They are primarily designed as intake filters for low turbulence displacement laminar flow clean room ceilings and clean workbenches.

Typical applications can be found in: microelectronics, semiconductor manufacture, medicine, chemistry, pharmacy, microbiology, film and magnetic tape production, compact disk manufacture, laboratories and the food industry.


-
- ▼ Hepatex PL



Technical Data	Type	PL-R	PL-S
Rated face velocity *)	m/s	0.40	0.40
Initial pressure drop at rated face velocity	Pa	105	250
Final pressure drop	Pa	300	500
Filter medium area per m ² face section *)	m ² /m ²	10	11
Filter class according to EN 1822	–	E11	H13
Flammability class according to DIN 53 438	–	K1/F1	K1/F1
Max. continuous temperature	°C	125	125
Admissible relative air humidity	%	100	100
Initial separation efficiencies: EN 1822 (MPPS-DEHS aerosol)	%	95	99.95


*) relative to external filter dimensions

Dimensional sketch

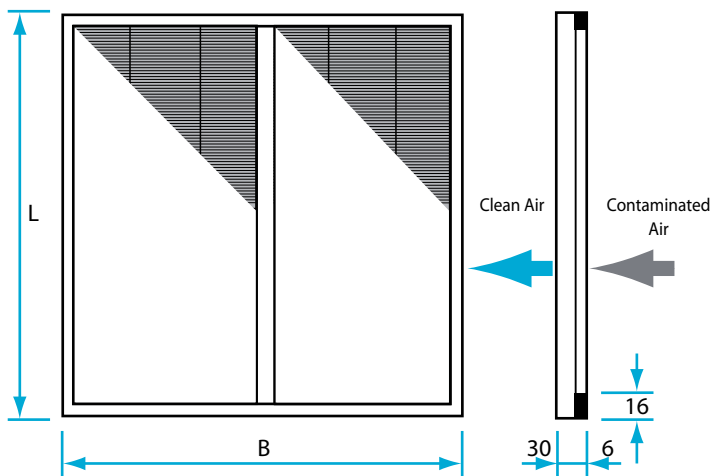

▲ Dimensions (mm)

Initial pressure drop

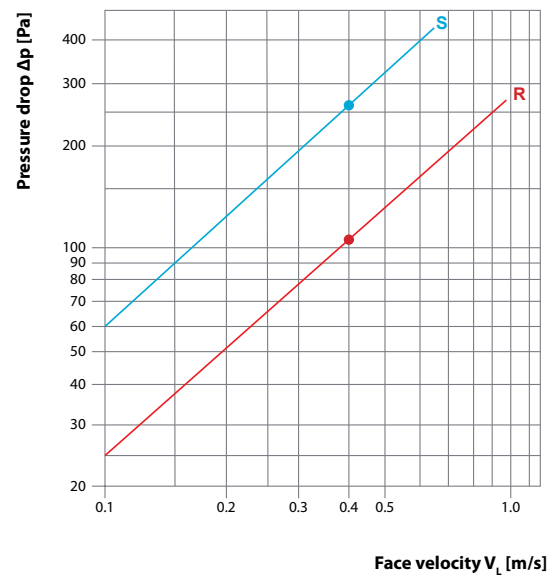

Available Sizes

Length L [mm]	Width B [mm]	Face area [m ²]	Air flow @ 0.4 m/s [m ³ /h]	Weight [kg]
204	610	0.12	180	1.2
610	610	0.37	535	3.0
762	610	0.46	670	3.7
915	610	0.56	805	4.4
1220	610	0.74	1070	5.8
762	762	0.58	835	4.6

Material specification

Filter medium	Micro glass fibre paper
Frame	Anodised aluminium
Sealant	Polyurethane
Gasket	EPDM foam-rubber with closed pores and surface skin

OUR LOCATIONS

ÖSTERREICH

Tel: +43 (0) 1 698 66 77 0

FRANCE

Tel: +33 (0) 1 64 07 61 25

ITALIA

Tel: +39 022 692 6321

SOUTH AFRICA

Tel: +27 (0) 114 250 470

SVERIGE

Tel: +46 (0) 325 661 600

UNITED KINGDOM

Tel: +44 (0) 1282 413 131

DANMARK

Tel: +45 364 966 00

SCHWEIZ

Tel: +41 (0) 433 992 700

NEDERLAND

Tel: +31 888 653 724

DEUTSCHLAND

Tel: +49 (0) 2339 128 00
oder +49 (0) 6181 9082 01

ESPAÑA

Tel: +34 937 522 718

In view of continuous research and development we reserve the right to modify specifications and dimensions without prior notice. For quoted standards, the issue valid at the print date of this leaflet is relevant.
© Vokes Air • 02/2011 • EN • 0112

www.vokesair.com



Taking small steps together, always ahead, towards a better world