



VOKES AIR

Taking small steps together, always ahead, towards a better world

Macrofalt

Pleated filter for coarse and fine dust





Macrofalt

Pleated filter for coarse and fine dust

APPLICATIONS



Clean Air



Power Generation



Clean Room



Industrial

KEY FACTS

- ▶ **Maintenance free**
For simple, low cost of ownership
- ▶ **Large filter area**
Provides a long service life and high dust holding capacity
- ▶ **No dust break through**
For assured performance
- ▶ **Patented, flexible pleat distance holders**
Allows a uniform air flow across the filter surface
- ▶ **Free from metal and fully incinerable**
For easy, environmentally friendly disposal

Macrofalt is used in air conditioning applications when optimisation of air filtration to a small area is required. A compact construction with a height of only 48mm, a large filter area and high dust holding capacity, are key features of this filter. The ratio of filter area to face area is: 13:1 – a value rarely found in competing filters.

Macrofalt filters have been tested at an independent laboratory and reach the filter classes G4 and F5 according EN779 and are suitable to VDI6022.



- ▼ Macrofalt





Technical Data

G4 Type		MF30B36	MF30S6	MF30B66
Average arresstance (EN 779)	%	>90	>90	>90
Dimensions (w x h x d)	mm	287 x 592 x 48	490 x 592 x 48	592 x 592 x 48
Nominal air flow	m ³ /h	1700	2550	3400
Initial pressure drop	Pa	50	50	50

F5 Type		MF45B36	MF45B56	MF45B66
Average arresstance (EN 779)	%	95	96	96
Average efficiency (EN 779)	%	40-60	40-60	40-60
Dimensions (w x h x d)	mm	287 x 592 x 48	490 x 592 x 48	592 x 592 x 48
Nominal air flow	m ³ /h	1700	2550	3400
Initial pressure drop	Pa	80	80	80

Macrofalt general data				
Recommended final pressure drop	Pa	250	250	250
Relative air humidity	%	100	100	100
Continous operating temperature	°C	80	80	80
Filter area	m ²	2.2	3.8	4.6
Frame Size	mm	305 x 610	508 x 610	610 x 610
Weight	kg	0.6	0.8	1.0

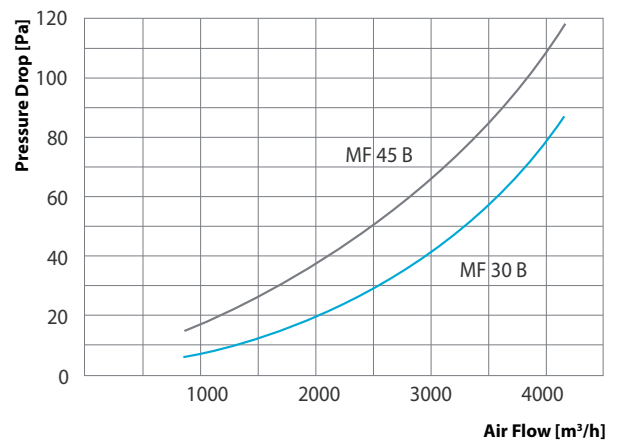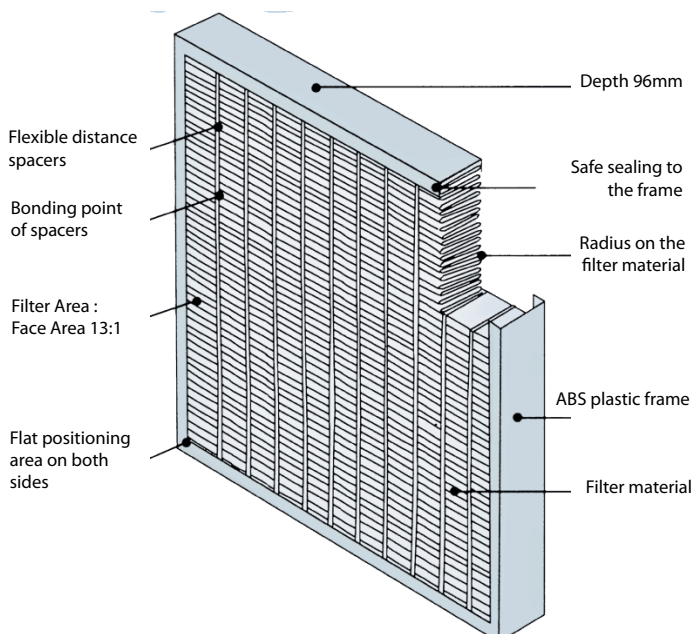

Construction

Macrofalt consists of well-established, nonwoven technology of different filter efficiencies. The media is pleated at optimised distances and fixed with flexible distance holders according to a patented technique. With this process filter packs are generated which will be fixed in the plastic frames tightly and provide an excellent seal.

OUR LOCATIONS

ÖSTERREICH

Tel: +43 (0) 1 698 66 77 0

FRANCE

Tel: +33 (0) 1 64 07 61 25

ITALIA

Tel: +39 022 692 6321

SOUTH AFRICA

Tel: +27 (0) 114 250 470

SVERIGE

Tel: +46 (0) 325 661 600

UNITED KINGDOM

Tel: +44 (0) 1282 413 131

DANMARK

Tel: +45 364 966 00

SCHWEIZ

Tel: +41 (0) 433 992 700

NEDERLAND

Tel: +31 888 653 724

DEUTSCHLAND

Tel: +49 (0) 2339 128 00
oder +49 (0) 6181 9082 01

ESPAÑA

Tel: +34 937 522 718

In view of continuous research and development we reserve the right to modify specifications and dimensions without prior notice. For quoted standards, the issue valid at the print date of this leaflet is relevant.
© Vokes Air • 02/2011 • EN • 0009

www.vokesair.com



Taking small steps together, always ahead, towards a better world