



# VOKES AIR

Taking small steps together, always ahead, towards a better world

## Micratex FP-P-HT

The superior solution





# Micratex FP-P-HT

The superior solution

---

## APPLICATIONS

---



Clean Air



Power Generation



Clean Room



Industrial

## KEY FACTS

---

- ▶ **Operating temperature of up to 120 °C**  
Suitable for use in the most extreme of operating environments
- ▶ **Glass fibre paper**  
No fibre loss or shedding
- ▶ **Large filter surface of 8.5m<sup>2</sup>**  
For a high dust holding capacity and long service life
- ▶ **Lightweight**  
Easy to install, handle and remove
- ▶ **Low pressure drop**  
Reduced energy consumption
- ▶ **Air flow up to 3000 m<sup>3</sup>/h per cell**  
Suited for even the most demanding of applications
- ▶ **Self-supporting and rigid**  
Provides a high burst pressure and eliminates dust migration
- ▶ **Fully incinerable, plastic cavity profile frame**  
For simple, environmentally-friendly disposal
- ▶ **Compact with an installation depth of only 88 mm**  
Easy to handle and store

**Designed to operate within the harshest of environments, Micratex FP-P-HT is the high temperature version of our popular Micratex FP-P.**

A galvanised steel frame allows this filter to operate continuously in temperatures of up to 120 °C, meaning that even in the most inhospitable of conditions Micratex FP-P-HT will retain its high performance and rigidity.

A filter surface area of 8.5 m<sup>2</sup>, coupled with a depth of only 88 mm and a light weight, mean that Micratex FP-P-HT provides a long life and low pressure drop in a compact, durable design.



- 
- ▼ Micratex FP-P-HT



## Technical Data

Micratex FP-P-HT		F6 - 610	F7 - 610	F8 - 610	F9 - 610	E11 - 610	E12 - 610
<b>Air Flow (normal service life)</b>	m <sup>3</sup> /h	3000	3000	3000	2500	2500	1500
<b>Initial pressure drop</b>	Pa	100	120	155	180	250	300
<b>Air Flow (long service life)</b>	m <sup>3</sup> /h	2500	2500	2500	2000	2000	1000
<b>Initial pressure drop</b>	Pa	75	90	120	140	190	190
<b>Filter class as per EN 779 EN 1822</b>	-	F6	F7	F8	F9 (E10)	E11	E12
<b>Efficiency (atmospheric average, EN 779)</b>	%	79	82	93	98	-	-
<b>Arrestance (gravimetric average, EN 779)</b>	%	≥ 98	≥ 99	≥ 99	~ 100	-	-
<b>Efficiency (MPPS-DEHS), EN 1822</b>	%	-	-	-	> 85	> 95	> 99.5

### Application Parameters

<b>Continuous Operating Temp.</b>	≤ 120°C
<b>Pressure Drop:</b>	
<b>Rec. Final Pressure Drop</b>	≤ 450 Pa
<b>Max. Final Pressure Drop</b>	≤ 800 Pa
<b>Burst Pressure (new filter)</b>	> 1000 Pa
<b>Admissible Relative Humidity</b>	< 100%



### Materials

<b>Filter medium</b>	Micro-glass fibre paper pleated to form mats
<b>Frame</b>	Galvanised steel
<b>Sealant</b>	Polyurethane
<b>Flammability class of materials used</b>	K1/F1 according to DIN 53438

All components are classified as class 1 (no visible microbiological growth)

Available Types	-305	-610
<b>Dimensions H (mm)</b>	287	592
<b>Weight (kg)</b>	2.0	3.0

Pressure drop versus air flow

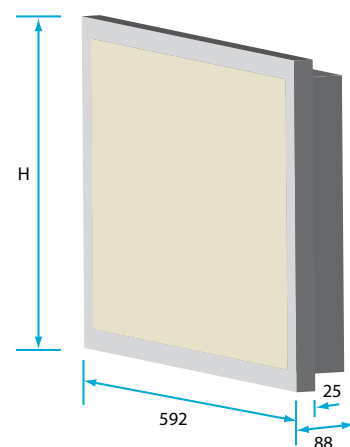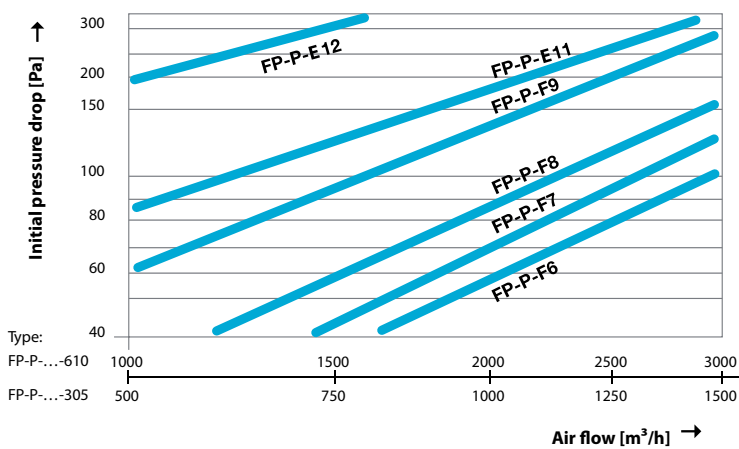

▲ Dimensions [mm]

## OUR LOCATIONS

---

### ÖSTERREICH

Tel: +43 (0) 1 698 66 77 0

### FRANCE

Tel: +33 (0) 1 64 07 61 25

### ITALIA

Tel: +39 022 692 6321

### SOUTH AFRICA

Tel: +27 (0) 114 250 470

### SVERIGE

Tel: +46 (0) 325 661 600

### UNITED KINGDOM

Tel: +44 (0) 1282 413 131

### DANMARK

Tel: +45 364 966 00

### SCHWEIZ

Tel: +41 (0) 433 992 700

### NEDERLAND

Tel: +31 888 653 724

### DEUTSCHLAND

Tel: +49 (0) 2339 128 00  
oder +49 (0) 6181 9082 01

### ESPAÑA

Tel: +34 937 522 718

In view of continuous research and development we reserve the right to modify specifications and dimensions without prior notice. For quoted standards, the issue valid at the print date of this leaflet is relevant.  
© Vokes Air • 02/2011 • EN • 0007



Taking small steps together, always ahead, towards a better world