


Pc Bench

Suction benches with cartridges filtration system


The Pc Bench

- 1 Inlet
- 2 Staves
- 3 Pre-chamber
- 4 Filtering cartridge
- 5 Pressure tank
- 6 Cyclic sequential panel
- 7 Centrifugal fan
- 8 Dust collection drawers
- 9 Outlet

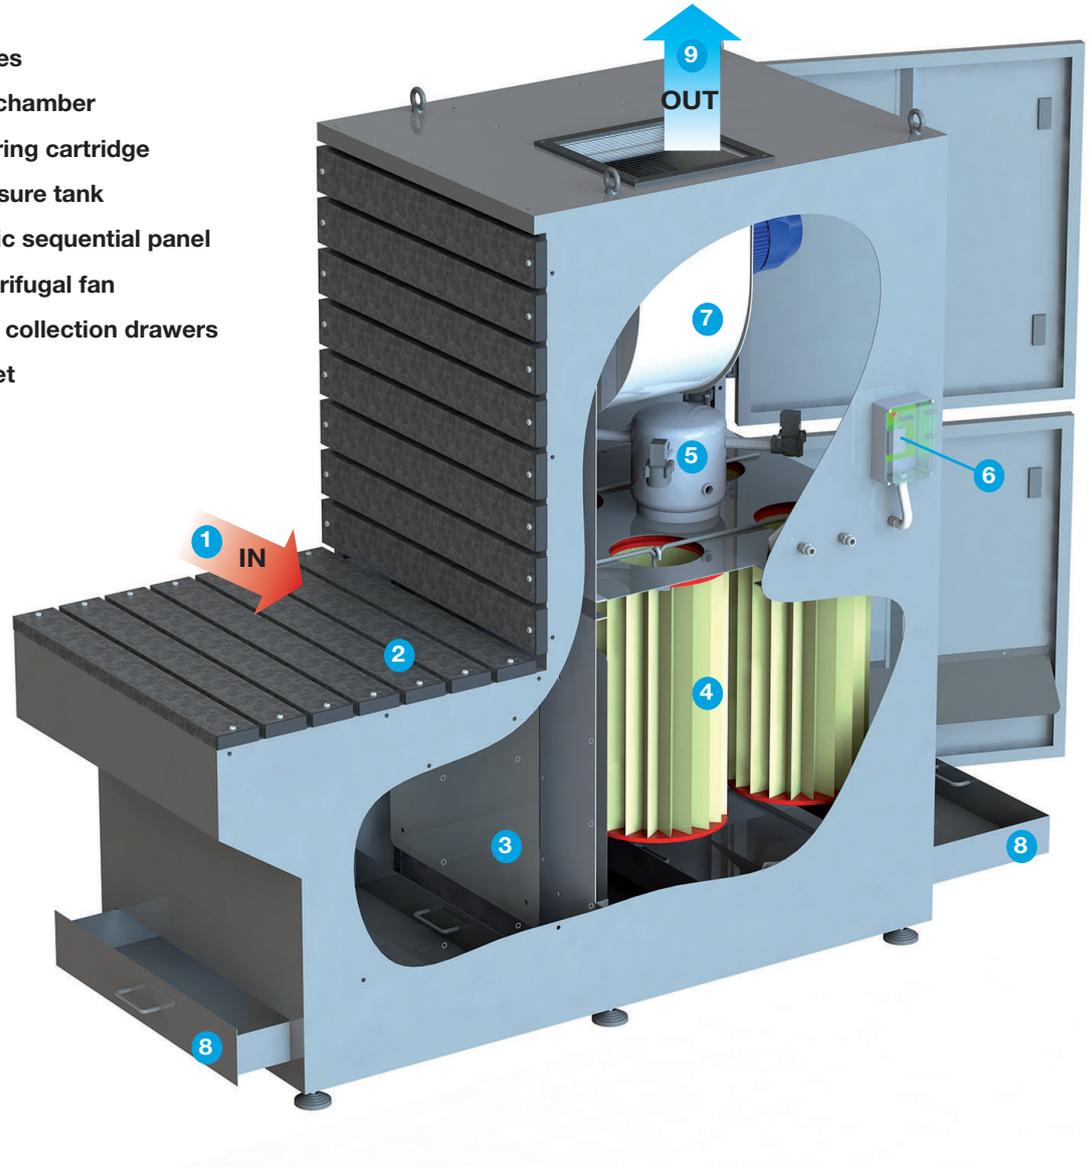


Operation

PC-BENCH-SV is a new range of suction benches with cartridges filtration system, and self-cleaning pneumatic system, with fan and drawers and side table and dust collection filter area. PC-BENCH-SS, has been developed to be coupled with centralized filtration systems.

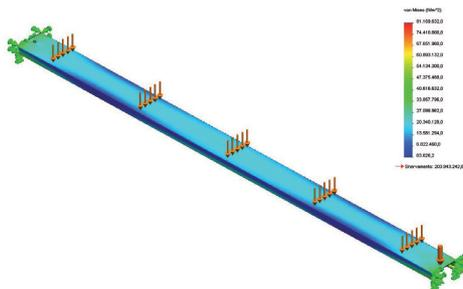


Structural inspection with load of 400 kg/m²

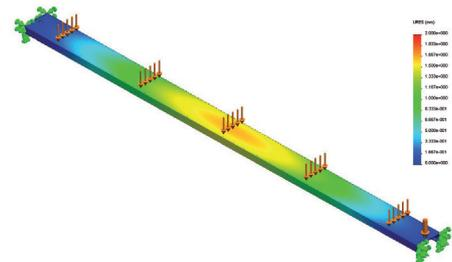


Check for deformation with 400 kg / m²


The Range

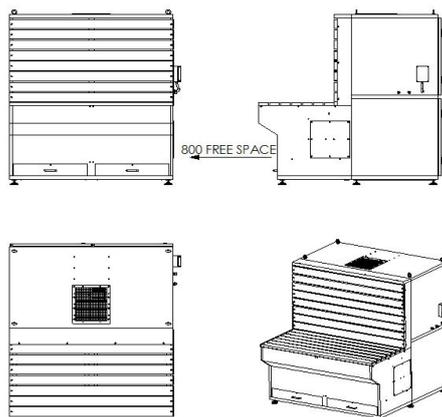

Pc Bench-SV

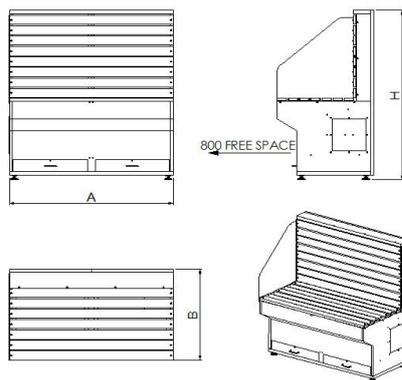

Pc Bench-SS

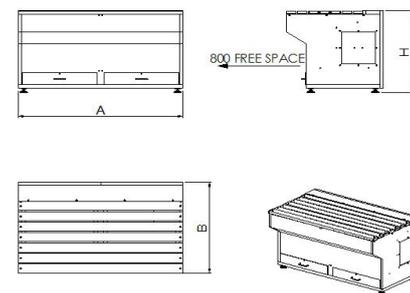

Pc Bench-SS-P

Model	Suction plan mm	Suction front mm	AirFlow m³/h	Power kW	A mm	B mm	H mm	Input flange mm
PC004/BENCH-SV	850 x 800	850 x 900	3.000	3	850	1900	1900	-
PC008/BENCH-SV	1700 x 800	1700 x 900	6.000	5,5	1700	1900	1900	-
PC004/BENCH-SS	850 x 800	850 x 900	3000*	-	850	1000	1900	Ø 250
PC008/BENCH-SS	1700 x 800	1700 x 900	6.000*	-	1700	1000	1900	350x350
PC004/BENCH-SS-P	850 x 800	-	3.000*	-	850	1000	900	Ø 200
PC008/BENCH-SS-P	1700 x 800	-	6.000*	-	1700	1000	900	Ø 250

*Advised

Optional

- Electric power board for fan control
- Silencer
- Final Absolute Filter PC-FFA
- Active Carbon Final Absolute Filter
- Adjustable diffusers for the internal recirculation PC-DIFF
- Cyclic Timer WITH DP Control inside (economizer)

Pc-Diff



Applications

- Deburring
- Sanding
- Grinding
- Dusty materials processing

A cleaner world.



HASCON FILTRATION S.r.l.
Via Firenze, 69
20025 LEGNANO (MI) - ITALY
Tel. +39 0331 52.74.03
Fax: +39 0331 52.74.84
www.hascon.it